

Oil Tinting Colors Automotive Lacquer Tinting Colors Acrytex Tinting Colors Latex Colors



# **BOYSEN**® AUTOMOTIVE LACQUER TINTING COLORS

BOYSEN® Automotive Lacquer Tinting Colors are concentrated lacquer-type tinting colors for lacquer-based paints. They mix easily and produce tints from pastel to medium shades.

# MIXING

To produce dark shades, choose from factory-mixed colors. Ideal ratio of colorant to paint is 1:16, respectively.



# **BOYSEN® ACRYTEX TINTING COLORS**

BOYSEN® Acrytex Tinting Colors are concentrated acrylic solvent-based tinting colorants for Acrytex products. They mix easily and produce tints from pastel to medium shades.

### MIXING

For darker shades, request for factory-mixed colors.



### **BOYSEN® LATEX COLORS**

BOYSEN® Latex Colors are concentrated, water-based acrylic colorants for water-based paints like Permacoat Latex Paints, Healthy Home, and Wallguard Dirt Resisting Latex. They mix easily and produce tints from pastel to medium shades.

### MIXING

To produce dark shades, choose from factory-mixed colors or go to the nearest Mix & Match paint mixing station. Ideal ratio of colorant to paint is 1:16, respectively. B-1466 Hansa Yellow and B-1407 Toluidine Red are only for interior use. For exterior applications, use B-1469 Exterior Yellow and B-1479 Exterior Red.

### **APPLICATION**

Stir well before using. Close container and wash painting tools in soapy water immediately after use.





For technical reasons connected to color reproduction and manufacturing, the colors shown in this collateral may not match the exact paint color.

# **BOYSEN® OIL TINTING COLORS**

BOYSEN® Oil Tinting Colors are concentrated alkyd-based tinting colors for alkyd-type paints like Quick Drying Enamel. They mix easily and produce tints from pastel to medium shades.

# MIXING

To produce dark shades, choose from factory-mixed colors. Ideal ratio of colorant to paint is 1:16, respectively. Do not use B-2315 Bulletin Red and B-2319 Hansa Yellow for exterior applications.

### **APPLICATION**


Stir well before using. Close container and clean painting tools immediately with BOYSEN® Paint Thinner B-0340.



# **BOYSEN®** COLORANTS

These colorants are formulated to be mixed into a base paint and should not be applied directly onto the substrate. Follow manufacturer's recommendations on mixing to prevent paint failure.

# PACKAGING Automotive Lacquer Tinting Colors Latex Colors Acrytex Tinting Colors Oil Tinting Colors \*\*X\*\* \*\*X\*\*

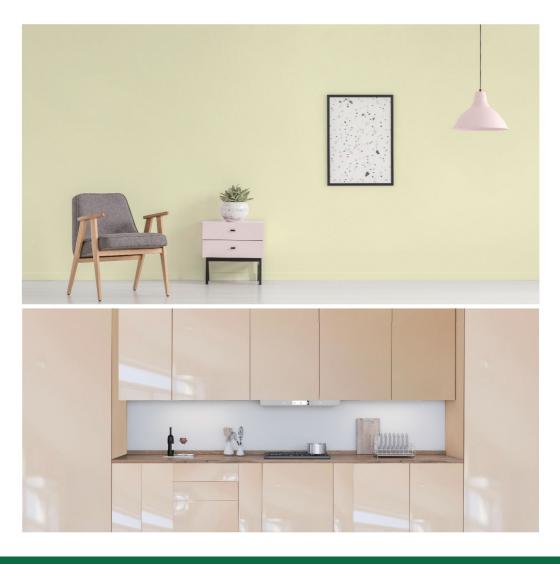



# PACIFIC PAINT (BOYSEN) PHILIPPINES, INC.

292 D. Tuazon Street, 1115 Quezon City, Philippines

Hotline: 8364-9999 Tel. Nos. 8364-3505 to 09; 8365-0561 to 64 Fax Nos. 8367-8881; 8361-7164 inquiry@boysen.com.ph www.boysen.com.ph



SP 241-242 2nd Level, IKEA Retail Integration South Parking Building, SM Mall of Asia, Pasay City 1300





Boysen Paints Philippines







BoysenPaintsPhil

