

For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color

SURFACE PREPARATION

New Concrete

Allow new concrete to dry for 14-28 days under normal weather conditions before painting. Surface to be painted should be clean and dry, free from oil, grease, dust, dirt, contaminants, and all loose grit and mortar. If neutralizing, treat surface with a solution of 1 part BOYSEN Masonry Neutralizer B-44 diluted in 16 parts water, applying liberally by brush and roller. Let dry overnight before rinsing with water to remove white crystals that form on the surface. Let dry before painting. However, if the concrete has been cured for more than 28 days, there is no need for neutralizer.

Repainting

Scrape all loose, scaling, flaking, and peeling paint manually or by using BOYSEN Paint and Varnish Remover B-141, as necessary. Wash surfaces clean and completely remove chemical residue. Let it dry.

For repainting concrete with chalky old paint, use BOYSEN Chalk Blocker B-7304 as surface conditioner. In case of mildew infestation, treat with a bleach solution (1:3, laundry bleach to water, respectively) by swabbing or brushing. To ensure proper treatment, let stand for 24 hours before cleaning off residue. Let dry.

PAINTING SCHEDULE

1st Coat

BOYSEN® Permacoat™ Flat Latex B-701

Putty

BOYSEN® Acrytex™ Cast B-1711 (exterior) BOYSEN® Masonry Putty B-7311 (interior)

2nd & 3rd Coat

BOYSEN® Permacoat™ Flat Latex B-701 BOYSEN® Permacoat™ Semi-Gloss Latex B-715 BOYSEN® Permacoat™ Gloss Latex B-710





All colors featured here are in Flat Finish, and are also available in Semi-Gloss Finish.

BSG-112 Kitten White

★ B-708 Gray Castle	BSG-101 Amish Linen	★ B-762 Pure Ivory	★ B-725 Bone Ivory
BSG-105 Coast Light	BSC-27 Antique White	★ B-702 Off-White	★ B-723 Moonlight
★ B-726 Stone Beige	BSG-3 Church Street	BSG-15 Aspen	BSG-16 Dapper Tan
★ B-722 Pawn Beige	BSC-58 Coral	★ B-780 Chocolate Brown	★ B-781 Chocolate Kiss
★ B-706 Tulle White	★ B-707 Winter Morning	BSG-4 Almost Winter	BSC-11 Off White Gray Cast

■ Recommended for interior walls

★ Readily available




All colors featured here are in Flat Finish, and are also available in Semi-Gloss Finish



SEMI-GLOSS LATEX

All colors in this section are readily available.

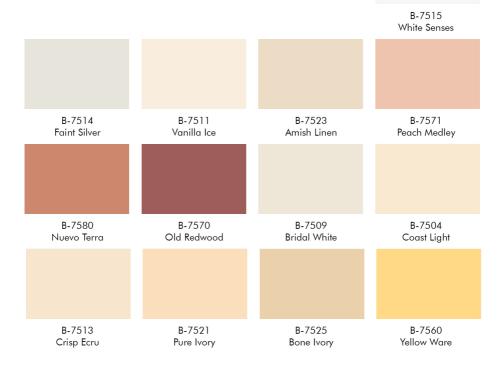



All colours shown here are as close to **BOYSEN® PERMACOAT™** colours as modern printing & colour reproduction techniques permit.



BOYSEN® Permacoat™ is a 100% acrylic paint with excellent hiding and outstanding durability.

TECHNICAL DATA



APPLICATION

Brush, roller or airless spray



COLORANTS

Will accept BOYSEN Latex Colors at a maximum level of 1/4 Liter per 4-Liter can.

Take note that B-1466 Hansa Yellow and B-1407 Toluidine Red are for interior painting only.



COVERAGE

30-35 sq. m. /4-Liters/ coat



THINNING

Use as supplied. If necessary, thin with not more than 1/2 Liter of clean water per 4-Liter can.



DRYING TIME

Dries to touch in 1 hour. Allow 2 hours before recoating.



CLEAN UP

Clean equipment with soap and water



PACIFIC PAINT (BOYSEN) PHILIPPINES, INC.

292 D. Tuazon Street, 1115 Quezon City, Philippines

Hotline: 8364-9999
Tel. Nos. 8364-3505 to 09; 8365-0561 to 64
Fax Nos. 8367-8881; 8361-7164
inquiry@boysen.com.ph
www.boysen.com.ph



SP 241-242 2nd Level, IKEA Retail Integration South Parking Building, SM Mall of Asia, Pasay City 1300



O Boysen Paints Philippines



@BoysenPaints



BoysenPaintsPhil



Blog: myboysen.com



studioboysen.com



Boysen App

Boysen®, Boysen® Eagle symbol, Acrytex™, Permacoat™ are registered trademarks of Pacific Paint (BOYSEN) Philippines, Inc.