
BOYSEN ROOFGARD

Gloss Acrylic Water-based Roof Paint

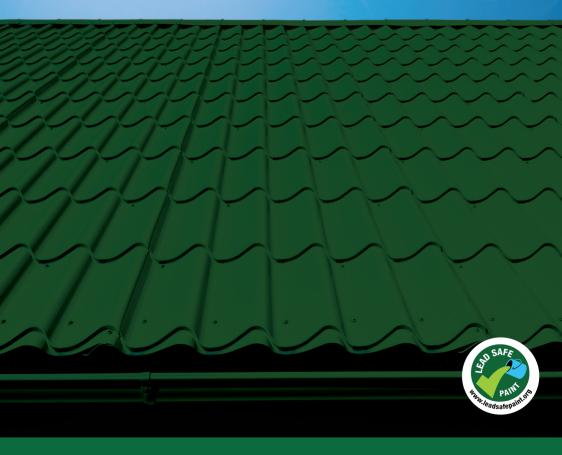

For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color.

BOYSEN® Roofgard™

BOYSEN® Roofgard™ is a gloss, acrylic, water-based roof paint designed to protect and adhere to galvanized surfaces. It gives a durable and flexible film and has fast drying time and good gloss retention. It is ideal for galvanized iron surfaces, pre-painted galvanized sheets, and unalazed roof tiles.

FEATURES



/ Excellent Adhesion

It provides excellent adhesion on properly prepared roofing materials such as galvanized and concrete roof tiles. Its thermoplastic film remains flexible over time without cracking and peeling.



/ Easy Water Clean-Up

No need for thinners and solvent reducers. Tools, painting equipment, spills, and paint drips can be cleaned by water and soap solution while still wet.



/ Good Corrosion Resistance

It inhibits flash rusting on metal and provides good corrosion resistance with its specially formulated acrylic binder and pigment combination.



Outstanding Durability

It provides excellent UV resistance and good gloss retention. The tightly adhering film retains its original color better than its solvent-based counterpart and offers good dirt pickup resistance.



Rapid Drying

It dries in an hour compared to the 8 hours drying time for solvent-based roofing paints. Recoating interval is 2-4 hours, resulting in faster paint jobs and significant labor cost savings.



Environmentally Safe

It is low in odor, non-flammable, and does not use hazardous solvents. It also does not contain lead or mercury.

SURFACE PREPARATION

Wipe the surface with a rag soaked in paint thinner to remove grease, oil, wax and other foreign matter. For new galvanized surfaces, etch the surface by applying 10% BOYSEN Metal Etching Solution B-71 (Dilute 1 part of B-71 to 9 parts water). Rinse with water and dry immediately.

Unpainted galvanized surfaces that have been exposed for 6 months or more need not be etched.

For recoating pre-painted galvanized surfaces in good condition, sand lightly then wipe the surface with a clean rag before applying paint. Remove all loose paint film to sound surface. Spot prime bare substrate.

For corroded galvanized surfaces, remove rust by wire brushing and use BOYSEN Metal Etching Solution B-71. Let it stay for 10-15 minutes. Be sure to remove all remaining residue. Immediately prime after drying.

For unglazed roof tiles, clean surfaces to be painted to remove dirt, dust, grease, oil, and other contaminants.

PAINTING SCHEDULE

NEW PAINTING

Primer:

 $\textit{Galvanized iron sheets: } \mathsf{BOYSEN}^{\$} \, \mathsf{Primeguard}^{\texttt{\tiny{T}}} \text{, } \mathsf{BOYSEN}^{\$} \, \mathsf{Rust-Off}^{\texttt{\tiny{T}}} \text{, } \mathsf{BOYSEN}^{\$} \, \mathsf{Red} \, \mathsf{Oxide}$

Metal Primer, BOYSEN® Epoxy Primer Red Oxide or Gray

Unglazed roof tiles: BOYSEN® Permacoat™ B-701 White or BOYSEN® EcoPrimer™ B-105

Topcoat: BOYSEN® Roofgard[™] (at least 2 coats of any desired color)

REPAINTING

For galvanized sheets with paint in good condition, clean surface from dirt and dust by washing and apply 2 coats of $BOYSEN^{*}$ Roofgard.

TECHNICAL DATA

Finish:

Gloss

0.000

VOC: <50 g/L

Practical Coverage:

30-35 sq. m. per 4-Liters

Dry Time:

Touch: 1 hour Recoat: 2 hours

Thinning Solvent:

Use as supplied. If necessary, thin with not more than $\frac{1}{2}$ Liter of clean water per 4-Liter can.

Clean-up Solvent:

Water

Tinting:

No tinting required.

Packaging:

Available in 4-Liters and

16-Liters

Application:

By brush, roller, or airless spray



PACIFIC BLUE B-2540



SAMAR BEIGE B-2520



BAGUIO GREEN B-2550



LAGUNA WHITE B-2501



SPANISH RED B-2570



TERRA COTTA B-2573



ORIENT GOLD B-2560



CHOCOLATE BROWN B-2580

^{*}For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color.



PACIFIC PAINT (BOYSEN) PHILIPPINES, INC.

Hotline: 8364-9999 Tel Nos. 8364-3505 to 09; 8365-0561 to 64



SP 241-242 2nd Level, IKEA Retail Integration South Parking Building, SM Mall of Asia, Pasay City 1300



Boysen Paints Philippines





BoysenPaintsPhil





studioboysen.com





Boysen®, Boysen® Eagle symbol and Roofgard™ are registered trademarks of Pacific Paint (BOYSEN) Philippines, Inc.

For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color.