

BOYSEN®

Oil Wood Stain



*Beautiful &
Natural Finish*



For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color.


BOYSEN® Oil Wood Stain



BOYSEN® Oil Wood Stain is available in various shades to bring out the natural tone in wood. It highlights wood grain and adds freshness and color. It provides superb protection for interior woodworks.

PAINTING SCHEDULE

Using a brush, apply BOYSEN® Oil Wood Stain to bare wood without primers or undercoats. Lightly brush or wipe over once along the grain to remove excess material and to smooth out any runs. Leave each coat for about 4-8 hours or until totally dry. Recoat for a darker shade.

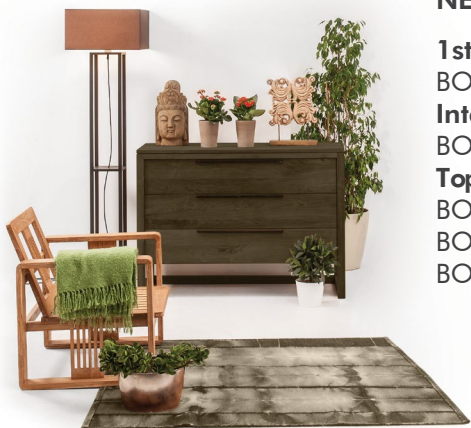

NEW WOOD

1st coat:

BOYSEN® Oil Wood Stain (any desired color)

Intermediate coat:

BOYSEN® Lacquer Sanding Sealer B-1254

Topcoat:

BOYSEN® Clear Gloss Lacquer B-1250

BOYSEN® Clear Dead Flat Lacquer B-1253

BOYSEN® Water White Clear Gloss Lacquer B-1258

MATERIAL PREPARATION

Thoroughly shake the can before opening .

Note: Boyesen® Oil Wood Stain is recommended for interior wooden surfaces only .
For exterior wooden surfaces, use **Boyesen® Xyladecor™**

For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color.

TECHNICAL DATA

Finish: Flat	Packaging: Available in 1-Liter and 4-Liters	Tinting: Not Applicable	Application: By brush
Dry Time: Touch: 2 hours Recoat: 12 hours	Practical Coverage per 4-Liters: 25 to 30 square meters <small>*Depending on surface texture and porosity</small>	Thinning Solvent: BOYSEN Paint Thinner B-0340	Clean-up Solvent: BOYSEN Paint Thinner B-0340

SURFACE PREPARATION

Sand surface until the wooden surface is smooth to the touch and no splinters or rough edges remain. Hammer all nails deep enough to apply putty. Open grain wood can be filled with BOYSEN Natural Wood Paste Filler B-60 using a putty knife. The filler may be tinted with stain to match the desired shade. Allow the filler to set for 15 minutes then rub off excess across the grain. Let it dry overnight.

Dust off surfaces completely then wipe with a clean rag. If repainting, remove all paint by wire brushing, scraping, or by using BOYSEN Paint and Varnish Remover B-141.

	Oak B-2708	Dark Oak B-2709	Maple B-2705	Walnut B-2700	Mahogany B-2707
FULL COLOR					
HALF TONE					

*For technical reasons connected to color reproduction and manufacturing, the colors shown may not match the exact stain color.

SERVICE CONDITIONS

The final color achieved by any wood stain will be affected by the natural color of the wood. Even wood from the same species may vary in color. It is always recommended to test the stain first on a small area to ensure that the final color is as desired.

For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color.



PACIFIC PAINT (BOYSEN) PHILIPPINES, INC.

292 D. Tuazon Street, 1115 Quezon City
Hotline: 8364-9999
Tel Nos. 8364-3505 to 09; 8365-0561 to 64
Fax Numbers: 8367-8881; 8361-7164
inquiry@boysen.com.ph

THE
COLOR
LIBRARY

SP 241-242 2nd Level, IKEA Retail Integration
South Parking Building, SM Mall of Asia, Pasay City 1300



Boysen Paints Philippines



@BoysenPaints



Boysen Paints Phil



Blog: myboysen.com



studioboysen.com



Boysen App

Boysen®, Boysen® Eagle symbol are registered trademarks of Pacific Paint (BOYSEN) Philippines, Inc.

JUNE 2023

For technical reasons connected with color reproduction and paint manufacturing, the colors shown may not match the exact paint color.